

# Moving platform with radio remote control, type FB 25-FU


## Technical Data - overview

type	FB_2x1	FB_DB	FB_2x4	FB_5,5
dimensions	2.000 x 1.000 x 167 mm	2.000 x 1.000 x 155 mm plus adjustable support brackets with ramps	4.440 x 2.250 x 167 mm	Ø 5.500 x 167 mm
max. bearing capacity	2,000 kg		3,000 kg	
supply voltage required for battery charger	230 V / 50 Hz			
max. range of the radio remote control	100 m			
functions	forward/backward, turning right/left			
max. travelling speed	8-50 m/min			
max. rotation speed	1-5 rpm			
max. operating time	6 h			
standard surface	wooden cover with black surface			

# Moving platform with radio remote control, type FB 25-FU

## Technical Data - site 1


type	FB_2mx1m
dimensions	2.000 x 1.000 x 167 mm
max. bearing capacity	2.000 kg
supply voltage required for battery charger	230 V / 50 Hz
max. range of the radio remote control	100 m
functions	forward/backward, turning right/left
max. travelling speed	8-50 m/min
max. rotation speed	1-5 rpm
max. operating time	6 h
standard surface	wooden cover with black surface

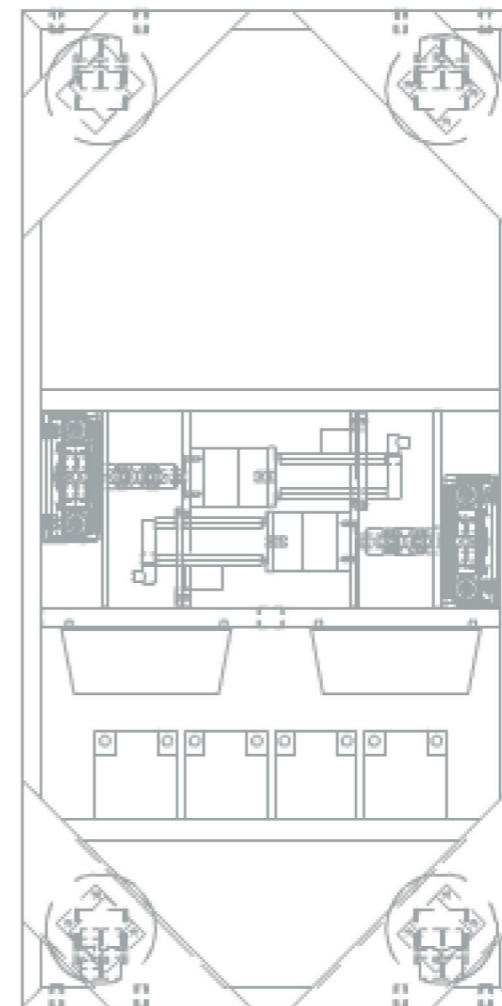

# Moving platform with radio remote control, type FB 25-FU

## Technical Data - site 2


type	FB_db2
dimensions	2.000 x 1.000 x 155 mm plus adjustable support brackets with ramps
max. bearing capacity	2.000 kg
supply voltage required for battery charger	230 V / 50 Hz
max. range of the radio remote control	100 m
functions	forward/backward, turning right/left
max. travelling speed	8-50 m/min
max. rotation speed	1-5 rpm
max. operating time	6 h
standard surface	wooden cover with black surface

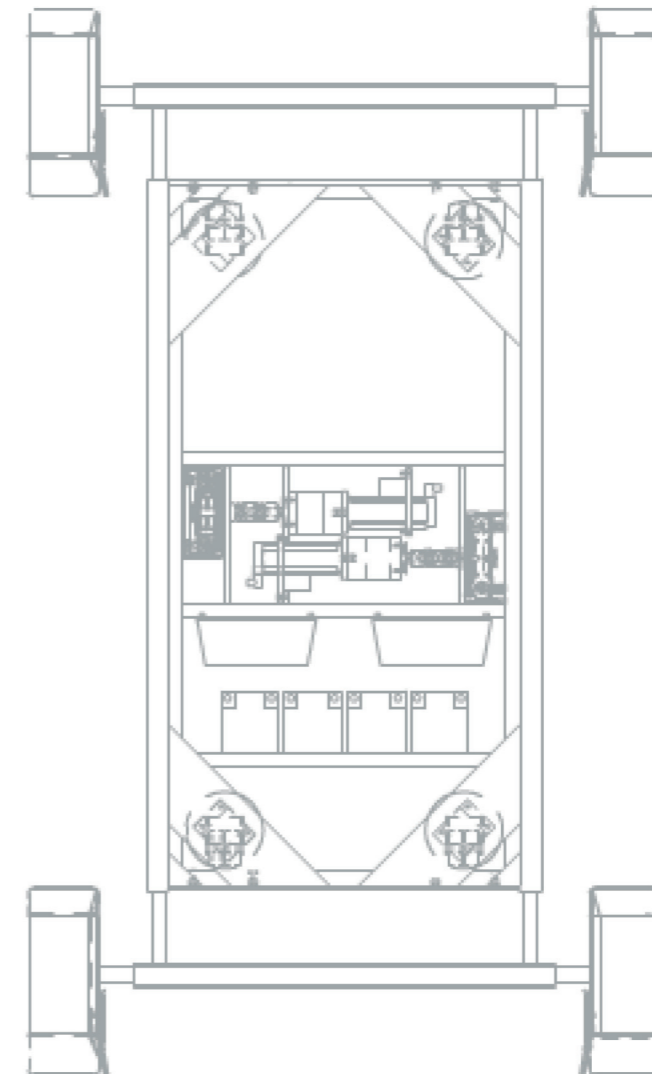

# Moving platform with radio remote control, type FB 25-FU

## Technical Data - site 3

type	FB_225x444
dimensions	4.440 x 2.250 x 167 mm
max. bearing capacity	3.000 kg
supply voltage required for battery charger	230 V / 50 Hz
max. range of the radio remote control	100 m
functions	forward/backward, turning right/left
max. travelling speed	8-50 m/min
max. rotation speed	1-5 rpm
max. operating time	6 h
standard surface	wooden cover with black surface

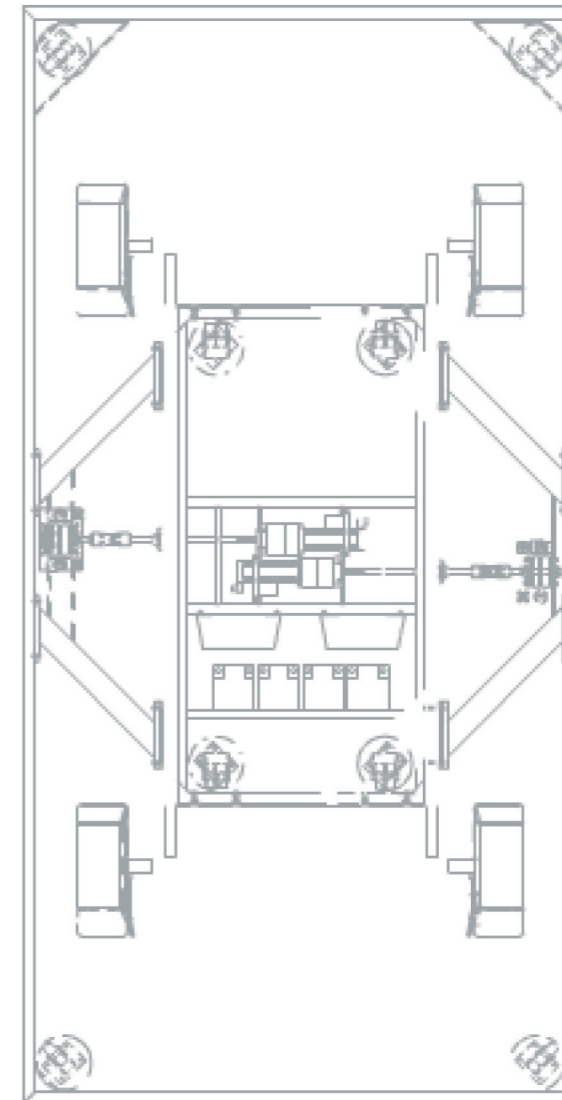

# Moving platform with radio remote control, type FB 25-FU

## Technical Data - site 4

type	FB_5,5
dimensions	Ø 5.500 x 167 mm
max. bearing capacity	3.000 kg
supply voltage required for battery charger	230 V / 50 Hz
max. range of the radio remote control	100 m
functions	forward/backward, turning right/left
max. travelling speed	8-50 m/min
max. rotation speed	1-5 rpm
max. operating time	6 h
standard surface	wooden cover with black surface

